现货库存、技术资料、百科信息、热点资讯，精彩尽在鼎好！

Addendum for PCN-Datasheet 2004-018-A: BTS 5440 G

This Addendum and PCN-Datasheet refers to the PCN 2004-018-A:
"Minor datasheet adaption for BTS 5240 L, BTS 5240 G, BTS 5440 G ".
The PCN-datasheet attached will be valid starting from August 2004.

There are the following changes in the datasheet (on page 7):

Old:

	Symbol	min	typ	max	Unit
Current limit adjustment threshold voltage	$V_{CLA(T-)}$	2.6	-	-	V
		-	-	3.6	

New:

	Symbol	min	typ	max	Unit
Current limit adjustment threshold voltage	$V_{CLA(T-)}$	2.0	-	-	V
		-	-	4.0	

Smart High-Side Power Switch
Four Channels: 4 x 25mΩ
IntelliSense

Product Summary

Operating voltage	$V_{bb(on)}$	4,5...28 (Loaddump: 40 V)		V
Active channels		one	four parallel	
On-state resistance	R_{ON}	25	6.5	mΩ
Nominal load current	$I_{L(nom)}$	6.2	13.9	A
Current limitation Low	$I_{L(SCr)}$	10		A
High		40		

Package



P-DSO-28-19

General Description

- N channel vertical power MOSFET with charge pump, ground referenced CMOS compatible input and diagnostic feedback, monolithically integrated in Smart SIPMOS® technology.
- Providing embedded protective functions.
- Extern adjustable current limitation.

Application

- All types of resistive, inductive and capacitive loads
- µC compatible high-side power switch with diagnostic feedback for 12 V grounded loads
- Due to the adjustable current limitation best suitable for loads with high inrush currents, so as lamps
- Replaces electromechanical relays, fuses and discrete circuits

Basic Functions

- Very low standby current
- CMOS compatible input
- Improved electromagnetic compatibility (EMC)
- Stable behaviour at low battery voltage

Block Diagram

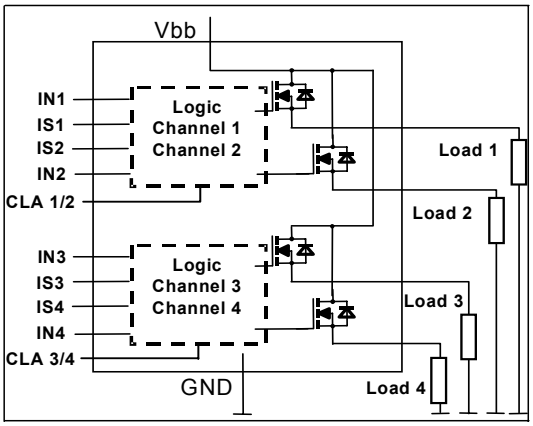

Protection Functions

- Reverse battery protection with external resistor
- Short circuit protection
- Overload protection
- Current limitation
- Thermal Shutdown
- Overvoltage protection with external resistor
- Loss of GND and loss of V_{bb} protection
- Electrostatic discharge Protection (ESD)

Diagnostic Functions: IntelliSense

- Proportional load current sense (with defined fault signal during thermal shutdown and overload)
- Additional open load detection in OFF - state
- Suppressed thermal toggling of fault signal

Functional diagram

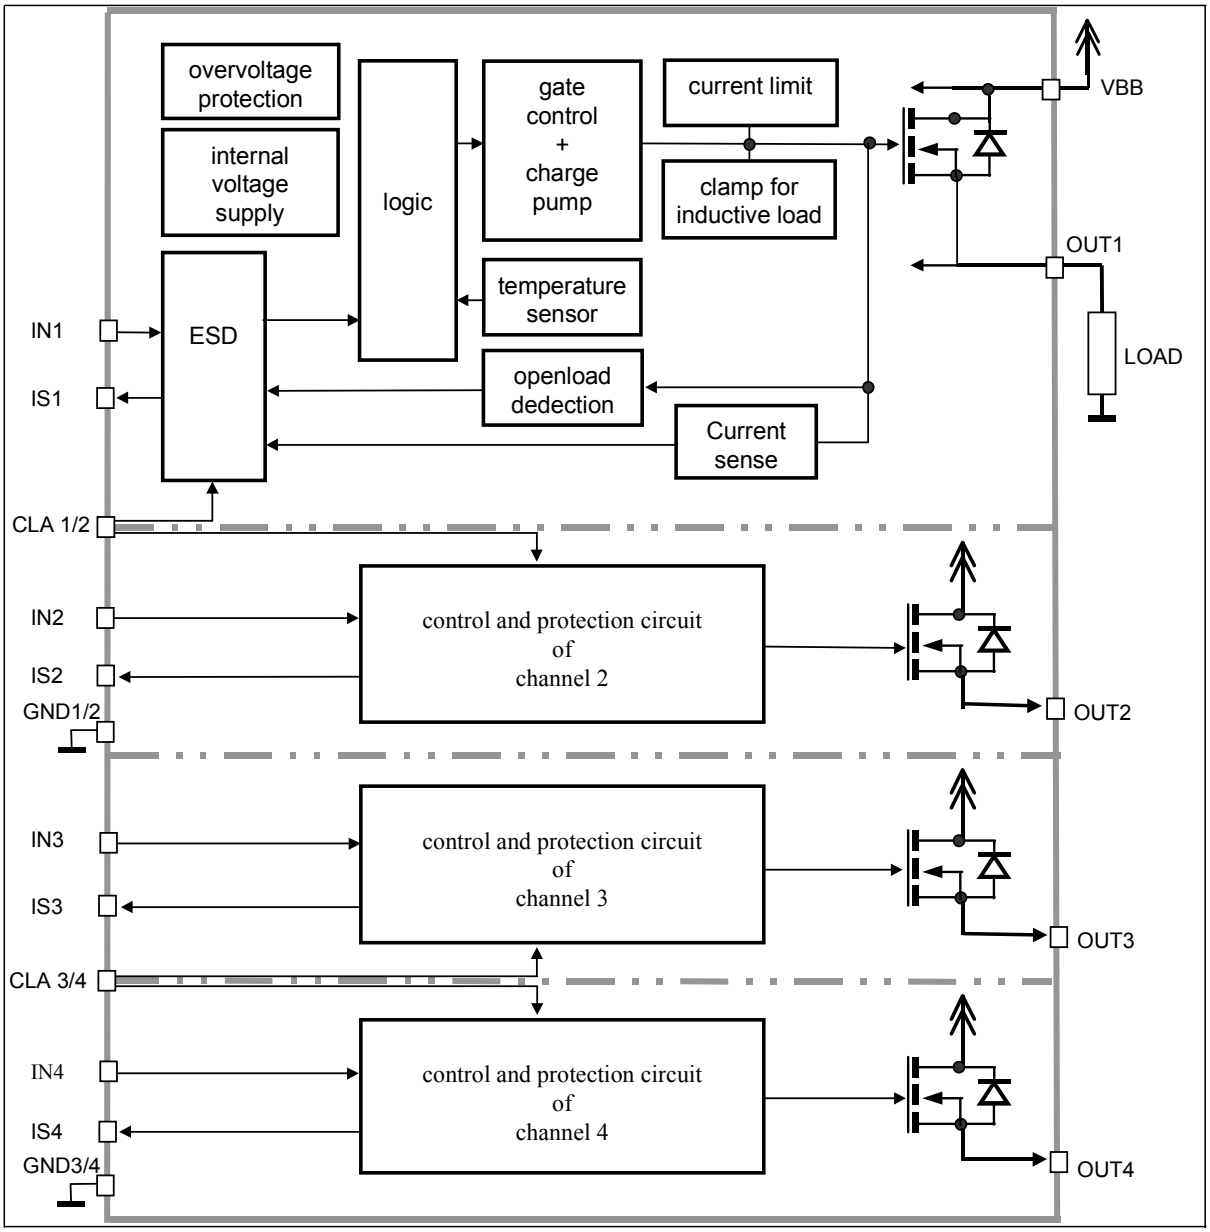

Pin definition and function

Pin	Symbol	Function
1,14, 15,28	V_{bb}	**Positive power supply voltage.** Design the wiring for the simultaneous max. short circuit currents from channel 1 to 4 and also for low thermal resistance
3	IN1	**Input 1,2,3,4** activates channel 1,2,3,4 in case of logic high signal
6	IN2	
9	IN3	
12	IN4	
25,26,27	OUT1	**Output 1,2,3,4** protected high-side power output of channel 1,2,3,4. Design the wiring for the max. short circuit current
22,23,24	OUT2	
19,20,21	OUT3	
16,17,18	OUT4	
4	IS1	**Diagnostic feedback 1...4** of channel 1 to 4 On state: advanced current sense with defined signal in case of overload or short circuit Off state: High on failure
5	IS2	
10	IS3	
11	IS4	
7	CLA 1/2	**Current limit adjust**; the current limit for channels 1/2 and 3/4 can be chosen as high (potential < 2,6V) or low (potential > 3,6V).
13	CLA 3/4	
2	GND 1/2	**Ground** of chip 1 (channel 1,2)
8	GND 3/4	**Ground** of chip 2 (channel 3,4)

Pin configuration

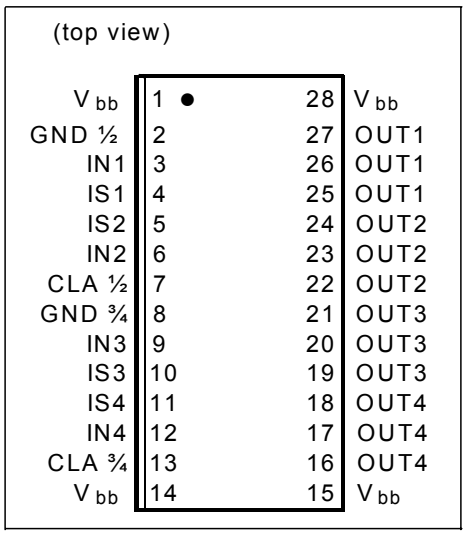
(top view)
Vbb 1 28 Vbb
GND ½ 2 27 OUT1
IN1 3 26 OUT1
IS1 4 25 OUT1
IS2 5 24 OUT2
IN2 6 23 OUT2
CLA ½ 7 22 OUT2
GND ¾ 8 21 OUT3
IN3 9 20 OUT3
IS3 10 19 OUT3
IS4 11 18 OUT4
IN4 12 17 OUT4
CLA ¾ 13 16 OUT4
Vbb 14 15 Vbb

Maximum Ratings at T_j=25°C, unless otherwise specified

Parameter	Symbol	Value	Unit
Supply voltage (overvoltage protection see page 6)	V_{bb}	28[1)]	V
Supply voltage for full short circuit protection; T_j = -40...150°C	$V_{bb(SC)}$	28[2)]	
Maximum voltage across DMOS	V_{ON}	52	
Load dump protection[3)] $V_{LoadDump}$[4)] = V_A + V_S; V_A = 13,5 V	$V_{Loaddump}$		
In = low or high; t_d = 400 ms; R_I[4)] = 2 Ω			
R_L = 2.25 Ω		40	
R_L = 6.8 Ω		53	
Load current (Short - circuit current, see page 7)	I_L	$I_{L(lim)}$[5)]	A
Operating temperature range	T_j	-40...+150	°C
Storage temperature range	T_{stg}	-55...+150	
Dynamical temperature rise at switching	dT	60	K
Power dissipation[6)] (DC), all channels active T_A = 85 °C	P_{tot}	1,6	W
Maximal switchable inductance, single pulse	$Z_{L(s)}$		mH
V_{bb}=12V, T_{jstart}=150°C; (see diagrams on page 12)			
I_L = 6 A, E_{AS} = 0.319 J, R_L = 0 Ω, one channel:		9.8	
I_L = 12 A, E_{AS} = 0.679 J, R_L = 0 Ω, two parallel channels:		5.2	
Electro**s**tatic **d**ischarge voltage IN:	V_{ESD}	1,0	kV
(Human Body Model) IS:		2,0	
according to ANSI EOS/ESD - S5.1 - 1993 , ESD STM5.1 - 1998 OUT:		4,0	
Continuous input voltage	V_{IN}	-10...16	V
Voltage at current limit adjustment pin	V_{CLA}	-10...16	
Current through current limit adjustment pin	I_{CLA}	±5.0	mA
Current through input pin (DC)	I_{IN}	±5.0	
Current through sense pin (DC) (see page 11)	I_{IS}	-5...+10	

[1] 18...28 V for 100 hours

[2] only single pulse, R_L = 200 mΩ ; L = 8 µH ; R and L are describing the complete circuit impedance including line, contact and generator impedances.

[3] Supply voltage higher than $V_{bb(AZ)}$ require an external current limit for the GND (150Ω resistor) and sense pin.

[4] R_I = internal resistance of the load dump test pulse generator.

[5] Current limit is a protection function. Operation in current limitation is considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

[6] Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for V_{bb} connection. PCB is vertical without blown air.

Electrical Characteristics

Parameter and Conditions, each of the four channels at T_j = -40...+150 °C, V_{bb} = 9...16 V, unless otherwise specified	**Symbol**	**Values**			**Unit**
		min.	**typ.**	**max.**	
Thermal Resistance					
junction - soldering point[1] each channel:	R_{thJS}	-	-	25	K/W
junction - ambient[2] one channel active:	R_{thJA}	-	40	-	K/W
all channels active:			32		
Load Switching Capabilities and Characteristics					
On-state resistance (V_{bb} to OUT), (see page 13)	R_{ON}				mΩ
T_j = 25 °C, I_L = 5 A, each channel:		-	21	25	
T_j = 150 °C, each channel:		-	42	50	
T_j = 25 °C, two parallel channels:		-	11	13	
T_j = 25 °C, four parallel channels:		-	5.5	6.5	
Nominal load current[2]	$I_{L(nom)}$				A
T_a = 85°C, $T_j \leq$ 150°C , one channel active:		5.7	6.2	-	
two channels active, per channel:		4.0	4.4	-	
four channels active, per channel:		3.1	3.4	-	
Output voltage drop limitation at small load currents I_L = 0.5 A	$V_{ON(NL)}$	-	40	-	mV
Output current while GND disconnected[3] (see diagram page 12) V_{IN} = 0 V	$I_{L(GNDhigh)}$	-	-	2	mA

[1] Soldering point is measured at Vbb-pin

[2] Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for V_{bb} connection. PCB is vertical without blown air.

[3] not subject to production test, specified by design

Electrical Characteristics

Parameter and Conditions, each of the four channels at T_j = -40...+150 °C, V_{bb} = 9...16 V, unless otherwise specified	**Symbol**	**Values**			**Unit**
		min.	**typ.**	**max.**	
Load Switching Capabilities and Characteristics					
Turn-on time[1] to 90% V_{OUT} R_L = 12 Ω, V_{bb} = 12 V	t_{on}	-	90	200	µs
Turn-off time[1] to 10% V_{OUT} R_L = 12 Ω, V_{bb} = 12 V	t_{off}	-	100	220	
Slew rate on[1] 10 to 30% V_{OUT}, R_L = 12 Ω, V_{bb} = 12 V	dV/dt_{on}	0.1	0.25	0.45	V/µs
Slew rate off[1] 70 to 40% V_{OUT}, R_L = 12 Ω, V_{bb} = 12 V	$-dV/dt_{off}$	0.09	0.25	0.4	
Operating Parameters					
Operating voltage[2]	$V_{bb(on)}$	4.5	-	28	V
Overvoltage protection[3] I_{bb} = 40 mA	$V_{bb(AZ)}$	41	47	52	
Standby current[4] (see diagram on page 13)	$I_{bb(off)}$				µA
T_j = -40...+25 °C, V_{IN} = 0 V		-	10	15	
T_j = 150 °C		-	-	40	

[1] See timing diagram on page 14.

[2] 18V...28V for 100 hours

[3] Supply voltages higher than $V_{bb(AZ)}$ require an external current limit for the status pin and GND pin (e.g. 150Ω). See also $V_{Out(CL)}$ in table of protection functions and circuit diagram on page 11.

[4] Measured with load; for the whole device; all channels off.

Electrical Characteristics

Parameter and Conditions, each of the four channels at T_j = -40...+150 °C, V_{bb} = 9...16 V, unless otherwise specified	**Symbol**	**Values**			**Unit**
		min.	**typ.**	**max.**	
Operating Parameters					
Off-State output current (included in $I_{bb(off)}$) V_{IN} = 0 V, each channel	$I_{L(off)}$	-	1.5	8	µA
Operating current[1)] V_{IN} = 5 V, per active channel	I_{GND}	-	1.6	4	mA
Protection Functions[2)]					
Current limit, (see timing diagrams, page 15)	$I_{L(LIM)}$				A
Low level; if potential at CLA = high		7	11	14	
High level; if potential at CLA = low		40	50	60	
Current limit adjustment threshold voltage	$V_{CLA(T-)}$	2.0	-	-	V
	$V_{CLA(T+)}$	-	-	4.0	
Repetitive short circuit current limit $T_j = T_{jt}$ (see timing diagrams on page 15)	$I_{L(SCr)}$				A
High level one active channel:		-	40	-	
two active channels[3)]:		-	40	-	
Low level one active channel:		-	7	-	
two active channels[3)]:		-	7	-	
Initial short circuit shutdown time low level:	$t_{off(SC)}$	-	3.5	-	ms
$T_{j,start}$ = 25°C ; V_{bb} = 13,5 V high level:		-	0.75	-	
Output clamp (inductive load switch off)[4)] I_L = 40 mA	$V_{Out(CL)}$	-	-15	-	V
Thermal overload trip temperature	T_{jt}	150	170	-	°C
Thermal hysteresis	ΔT_{jt}	-	10	-	K

[1] Add I_{IS}, if I_{IS} > 0

[2] Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

[3] At the beginning of the short circuit the double current is possible for a short time.

[4] If channels are connected in parallel, output clamp is usually accomplished by the channel with the lowest $V_{Out(CL)}$.

Electrical Characteristics

Parameter and Conditions, each of the four channels at T_j = -40...+150 °C, V_{bb} = 9...16 V, unless otherwise specified	**Symbol**	**Values**			**Unit**
		min.	**typ.**	**max.**	
Diagnostic Characteristics					
Open load detection voltage	$V_{OUT(OL)}$	2	3.2	4.4	V
Internal output pull down[1)] V_{OUT} = 13.5 V	$R_{OUT(PD)}$	11	23	35	kΩ
Current sense ratio, static on-condition $k_{ILIS} = I_L : I_{IS}$ I_L = 0.5 A I_L = 3 A I_L = 6 A	k_{ILIS}	 4640 4900 4900	 5800 5400 5350	 6960 5900 5800	
Sense signal in case of fault-conditions[2)] in off-state	V_{fault}	5	6.2	7.5	V
Current saturation of sense fault signal	I_{fault}	4	-	-	mA
Sense signal delay after thermal shutdown[3)]	$t_{delay(fault)}$	-	-	1.2	ms
Current sense output voltage limitation I_{IS} = 0 , I_L = 5 A	$V_{IS(lim)}$	5.4	6.5	7.3	V
Current sense leakage/offset current V_{IN} = 5 V, I_L = 0 , V_{IS} = 0	$I_{IS(LH)}$	-	-	5	µA
Current sense settling time to I_{IS} static ±10% after positive input slope[4)] , I_L = 0 to 5A	$t_{son(IS)}$	-	-	400	µs
Current sense settling time to I_{IS} static ±10% after change of load current[4)], I_L = 2.5 to 5A	$t_{slc(IS)}$	-	-	300	

[1] In case of floating output, the status doesn´t show open load.

[2] Fault condition means output voltage exceeds open load detection voltage $V_{OUT(OL)}$

[3] In the case of thermal shutdown the V_{fault} signal remains for $t_{delay(fault)}$ longer than the restart of the switch (see diagram on page 16).

[4] not subject to production test, specified by design

Electrical Characteristics

Parameter at T_j = -40...+150 °C, V_{bb} = 9...16 V, unless otherwise specified	Symbol	Values			Unit
		min.	typ.	max.	
Diagnostic Characteristics					
Status invalid after negative input slope	$t_{d(STOff)}$	-	-	1.2	ms
Status invalid after positive input slope with open load	$t_{d(STOL)}$	-	-	20	µs
Input Feedback[1)]					
Input resistance (see circuit page 11)	R_I	2.0	3.5	5.5	kΩ
Input turn-on threshold voltage	$V_{IN(T+)}$	-	-	2.4	V
Input turn-off threshold voltage	$V_{IN(T-)}$	1.0	-	-	
Input threshold hysteresis	$\Delta V_{IN(T)}$	-	0.5	-	
Off state input current V_{IN} = 0.4 V	$I_{IN(off)}$	3	-	40	µA
On state input current V_{IN} = 5 V	$I_{IN(on)}$	20	50	90	
Reverse Battery[2)]					
Reverse battery voltage	$-V_{bb}$	-	-	27	V
Drain-source diode voltage ($V_{OUT} > V_{bb}$) T_j = 150 °C, I_{bb} = -10 mA	$-V_{ON}$	-	330	-	mV

[1] If ground resistors R_{GND} are used, add the voltage drop across these resistor.

[2] Requires a 150Ω resistor in GND connection. The reverse load current through the intrinsic drain-source diode has to be limited by the connected load. Power dissipation is higher compared to normal operating conditions due to the voltage drop across the drain-source diode. The temperature protection is not active during reverse current operation! Input and status currents have to be limited. (see max. ratings page 4)

Truth Table - for each of the four channels

	Input level	Output level	Diagnostic output
Normal Operation	L H	L V_{bb}	Z[1)] $I_{IS} = I_L$ / kilis
Current Limitation[2)]	H	V_{bb}	V_{fault}
Short circuit to GND	L H	L L	Z[1)] V_{fault}
Overtemperature	L H	L L	Z[1)] V_{fault}
Short circuit to V_{bb}	L H	V_{bb} V_{bb}	V_{fault} < $I_{IS} = I_L$ / kilis[3)]
Open load	L H	> $V_{out(OL)}$ V_{bb}	V_{fault} Z[1)]

L = " Low" Level Z = high impedance, potential depends on external circuit
H = "High" Level V_{fault} = 5V typ., constant voltage independent of external sense resistor.

Parallel switching of channels is possible by connecting the inputs and outputs parallel.
The current sense ouputs have to be connected with a single sense resistor.

Terms

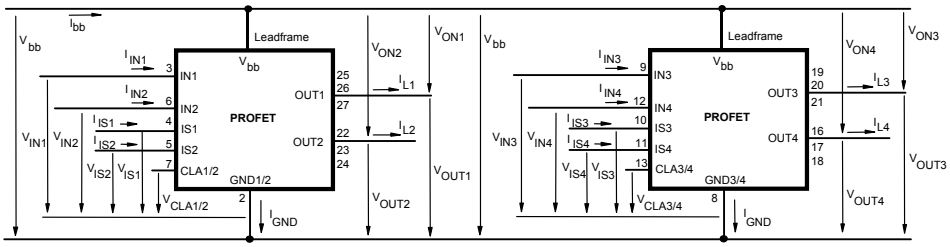

Leadframe (V_{bb}) is connected to pin 1, 14, 15, 28

[1]L-potential by using a sense resistor

[2]Current limitation is only possible while the device is switched on.

[3]Low ohmic short to V_{bb} may reduce the output current I_L and therefore also the sense current I_{IS}.

Input circuit (ESD protection), IN1...IN4

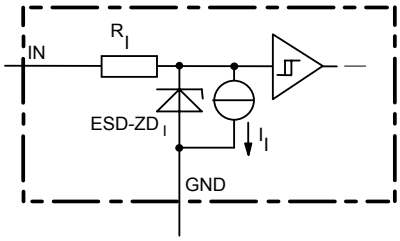

The use of ESD zener diodes as voltage clamp at DC conditions is not recommended.

Sense-Status output, IS1...IS4

ON-State: Normal operation: $I_S = I_L$ / kILIS

$V_{IS} = I_S * R_{IS}$; R_{IS} = 1kΩ nominal

$R_{IS} > 500\Omega$

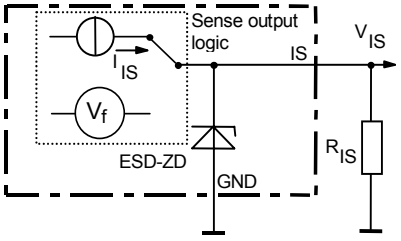

ESD zener diode: V_{ESD} = 6,1 V typ., max. 14 mA ;

ON-State: Fault condition so as thermal shut down or current limitation

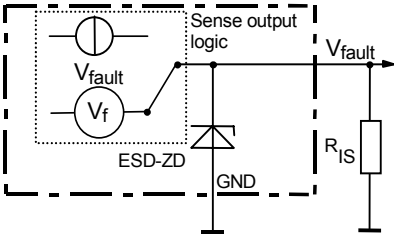

V_{fault} = 6 V typ ; $V_{fault} < V_{ESD}$ under all conditions

OFF-State diagnostic condition:

Open Load, if $V_{OUT} > 3$ V typ.; IN low

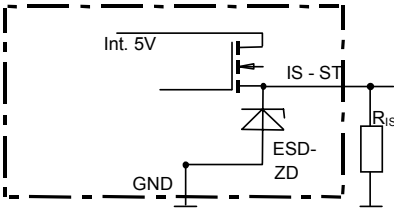

ESD-Zener diode: 6,1V typ., max. 5mA; $R_{ST(ON)} < 375\Omega$ at 1,6mA.. The use of ESD zener diodes as voltage clamp at DC conditions is not recommended.

Inductive and overvoltage output clamp, OUT1...OUT4

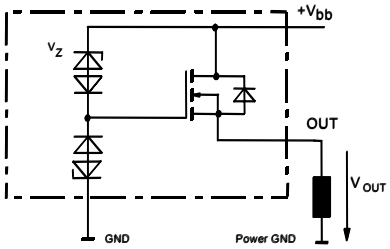

V_{Out} clamped to $V_{Out(CL)}$ = -15 V typ.

Overvolt. Protection of logic part OUT1...OUT4

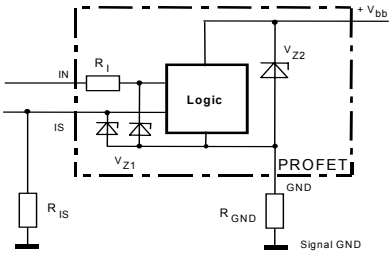

V_{Z1} = 6,1V typ., V_{Z2} = 47V typ., R_{GND} = 150Ω , R_{IS} = 1kΩ , R_I = 3,5kΩ typ.

Reverse battery protection
OUT1...OUT4

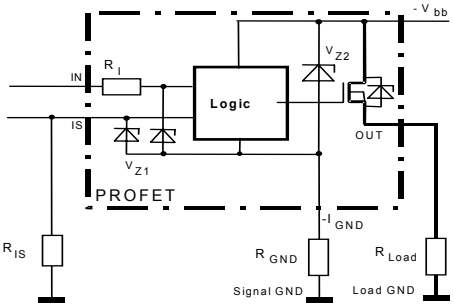

V_{Z1} = 6,1V typ., V_{Z2} = 47V typ., R_{GND} = 150Ω
R_{IS} = 1kΩ, R_I = 3,5kΩ typ.
In case of reverse battery the load current has to be limited by the load. Protection functions are not active.

Open load detection, OUT1...OUT4

Off-state diagnostic condition:
Open load, if V_{OUT} > 3 V typ.; IN = low

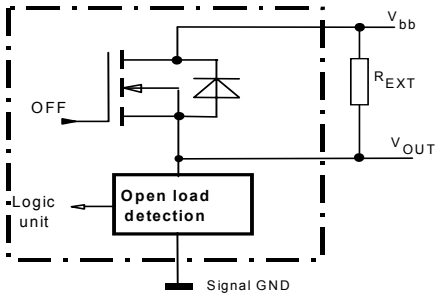

GND disconnect

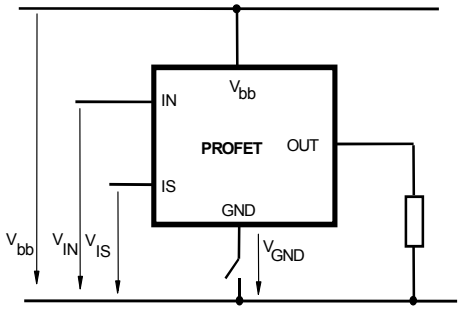

Any kind of load.

Vbb disconnect with energized inductive load

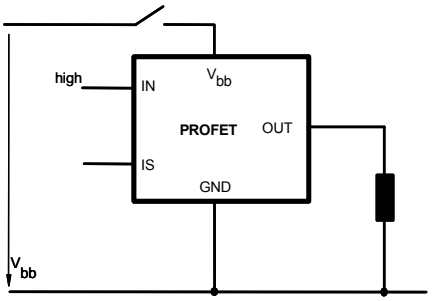

For inductive load currents up to the limits defined by Z_L each switch is protected against loss of V_{bb}.
(max. ratings and diagram on page 12)
Consider at your PCB layout that in the case of Vbb disconnection with energized inductive load all the load current flows through the GND connection.

Inductive load switch-off energy dissipation

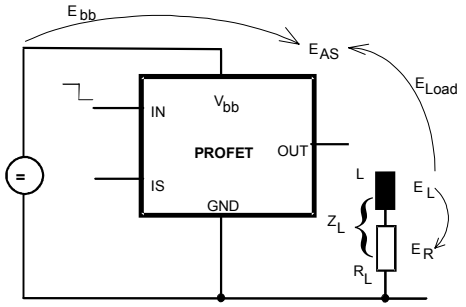

Energy stored in load inductance: $E_L = ½ * L * I_L^2$
While demagnetizing load inductance,
the enérgy dissipated in PROFET is
$E_{AS} = E_{bb} + E_L - E_R = V_{ON(CL)} * i_L(t)\,dt$,
with an approximate solution for R_L > 0Ω:

$$E_{AS} = \frac{I_L * L}{2 * R_L} * (V_{bb} + |V_{OUT(CL)}|) * \ln\left(1 + \frac{I_L * R_L}{|V_{OUT(CL)}|}\right)$$

Maximum allowable load inductance

for a single switch off (one channel)

L =f(IL); T_{jstart} = 150°C, V_{bb} = 12V, R_L = 0Ω

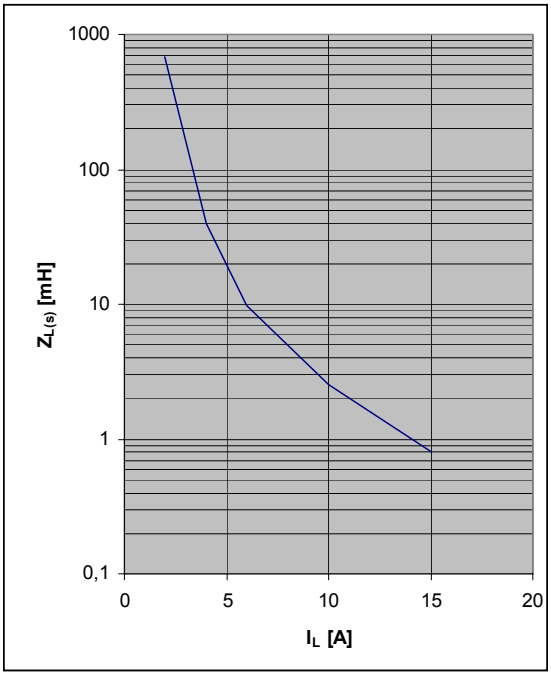

Typ. standby current

$I_{bb(off)}$ **= f(**T_j**)** ; V_{bb} = 16 V ; $V_{IN1...4}$ = low

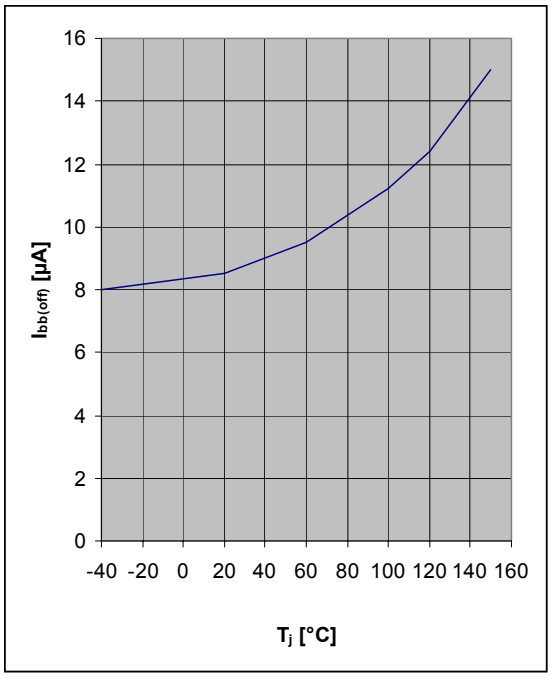

Typ. on-state resistance

R_{ON} **= f(**V_{bb}**,**T_j**)**; I_L = 5 A ; V_{in} = high

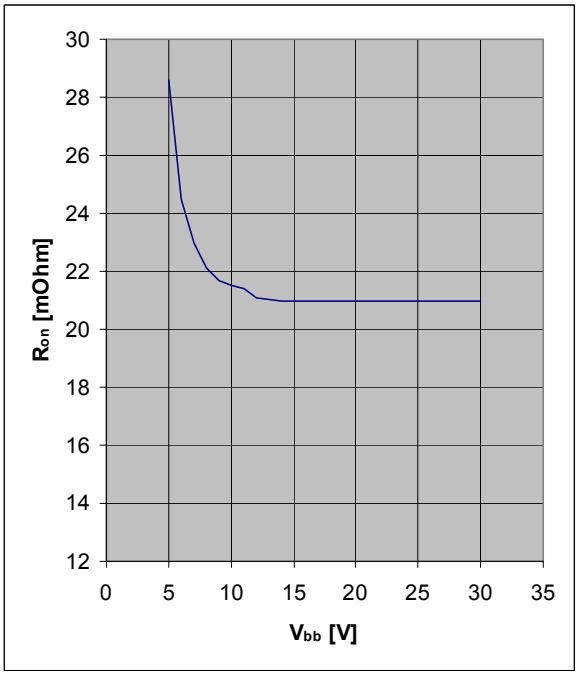

Timing diagrams

All channels are symmetric and consequently the diagrams are valid for channel 1 to channel 4.

Figure 1a: Switching a resistive load, change of load current in on-condition

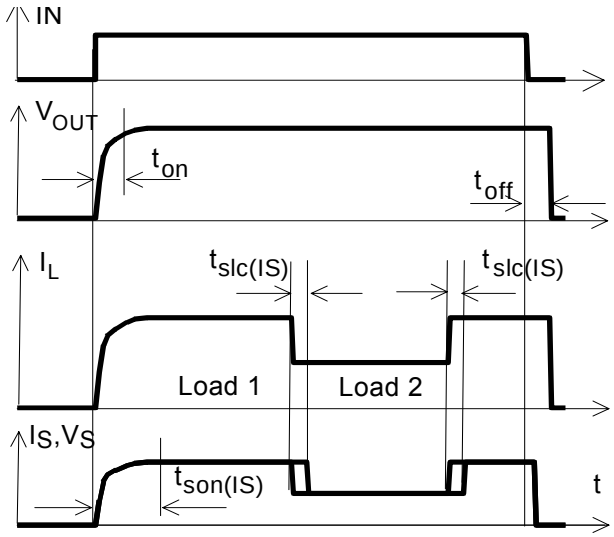

The sense signal is not valid during settling time after turn on or change of load current. tslc(IS) = 300 µs typ.

Figure 1b: V_{bb} turn on

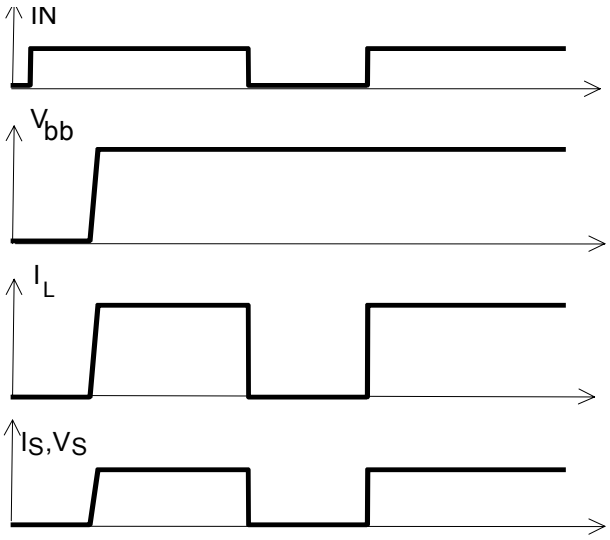

proper turn on under all conditions

Figure 1c: Behaviour of sense output: Sense current (I_S) and sense voltage (V_S) as function of load current dependent on the sense resistor.
Shown is V_S and I_S for three different sense resistors. Curve 1 refers to a low resistor, curve 2 to a medium-sized resistor and curve 3 to a big resistor. Note, that the sense resistor may not falls short of a minimum value of 500Ω.

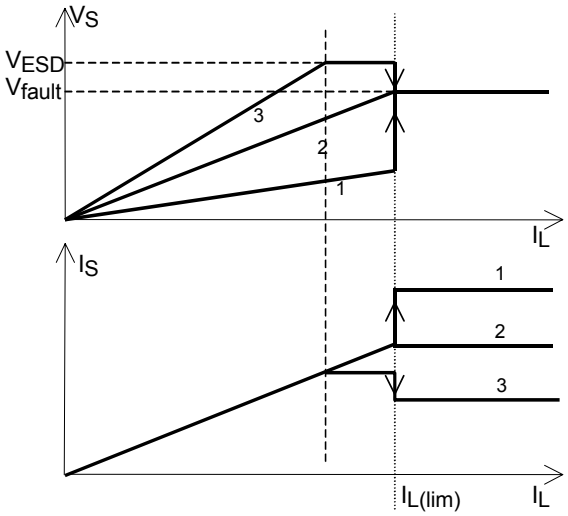

$I_S = I_L / k_{ILIS}$
$V_{IS} = I_S * R_{IS}$; R_{IS} = 1kΩ nominal
R_{IS} > 500Ω

Figure 2a: Switching a lamp

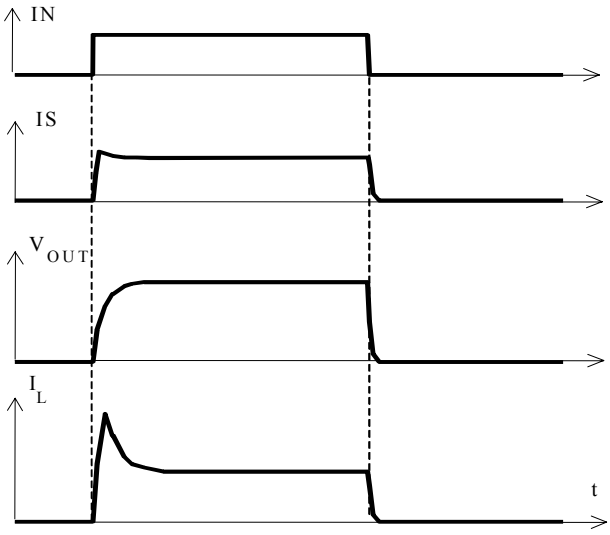

Figure 2b: Switching a lamp with current limit: The behaviour of I_S and V_S is shown for a resistor, which refers to curve 1 in figure 1c

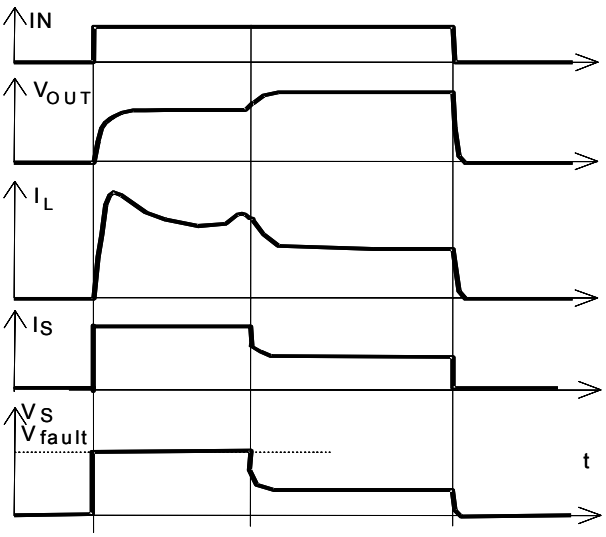

Figure 3a: Short circuit:
Shut down by overtemperature,
reset by cooling

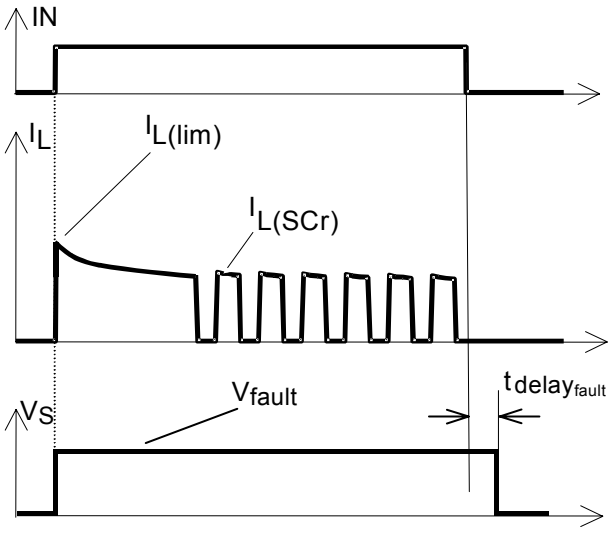

Heating up may require several milliseconds, depending on external conditions.
$I_{L(lim)}$ = 50A typ. increases with decreasing temperature.

Figure 3a: Turn on into short circuit,
shut down by overtemperature, restart by cooling
(channel 1 and 2 switched parallel)

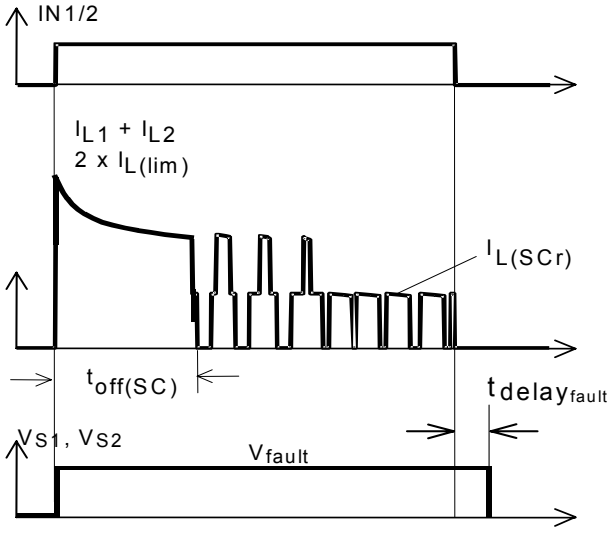

Figure 4a: Overtemperature
Reset if $T_j < T_{jt}$
The behaviour of I_S and V_S is shown for a resistor, which refers to curve 1 in figure 1c.

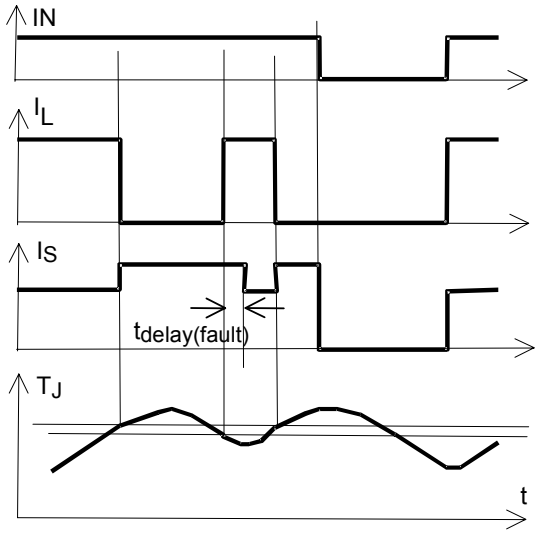

Figure 5a: Open-load: detection in OFF-state,
turn on/off to open load.
Open load of channel 1; other channels normal opertaion.

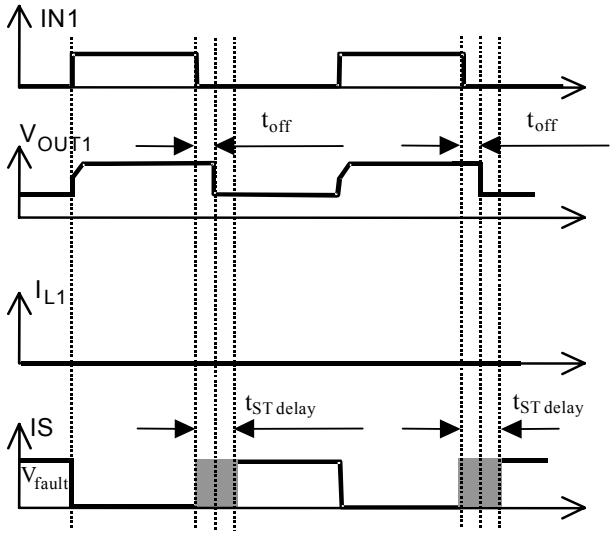

t_{off} = 250µs max.; $t_{ST\ delay}$ = 500µs max.
with pull up resistor at output

Figure 6a: Current sense ratio [1)]

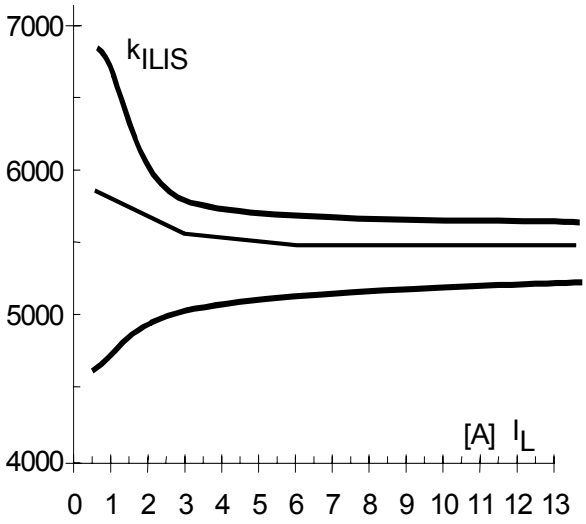

[1]This range for the current sense ratio refers to all devices. The accuracy of the k_{ILIS} can be raised by calibrating the value of k_{ILIS} for every single device.

Package and ordering code

all dimensions in mm

P-DSO-28-19

Sales Code	BTS 5440G
Ordering Code	Q67060-S6136

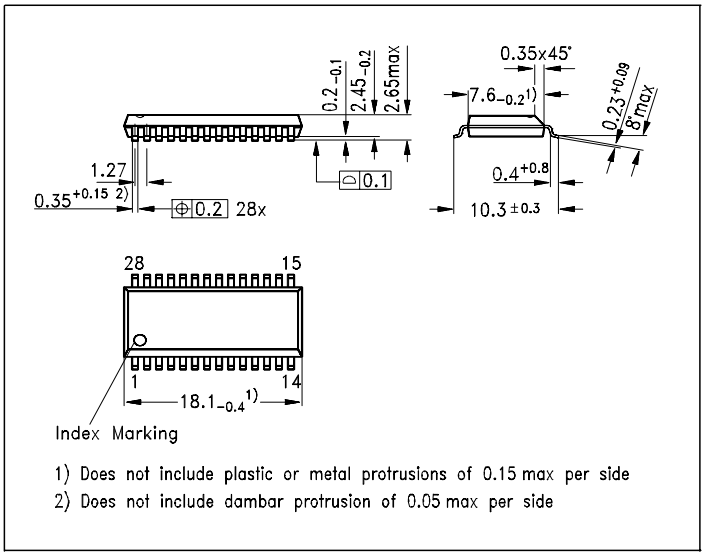

1) Does not include plastic or metal protrusions of 0.15 max per side
2) Does not include dambar protrusion of 0.05 max per side

Published by
Infineon Technologies AG,
St.-Martin-Strasse 53,
D-81669 München
© Infineon Technologies AG 2001
All Rights Reserved.

Attention please!
The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information
For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings
Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.